




Socket Automatic Assembly & Testing Line

插座自动装配测试线




产品介绍 Introduction

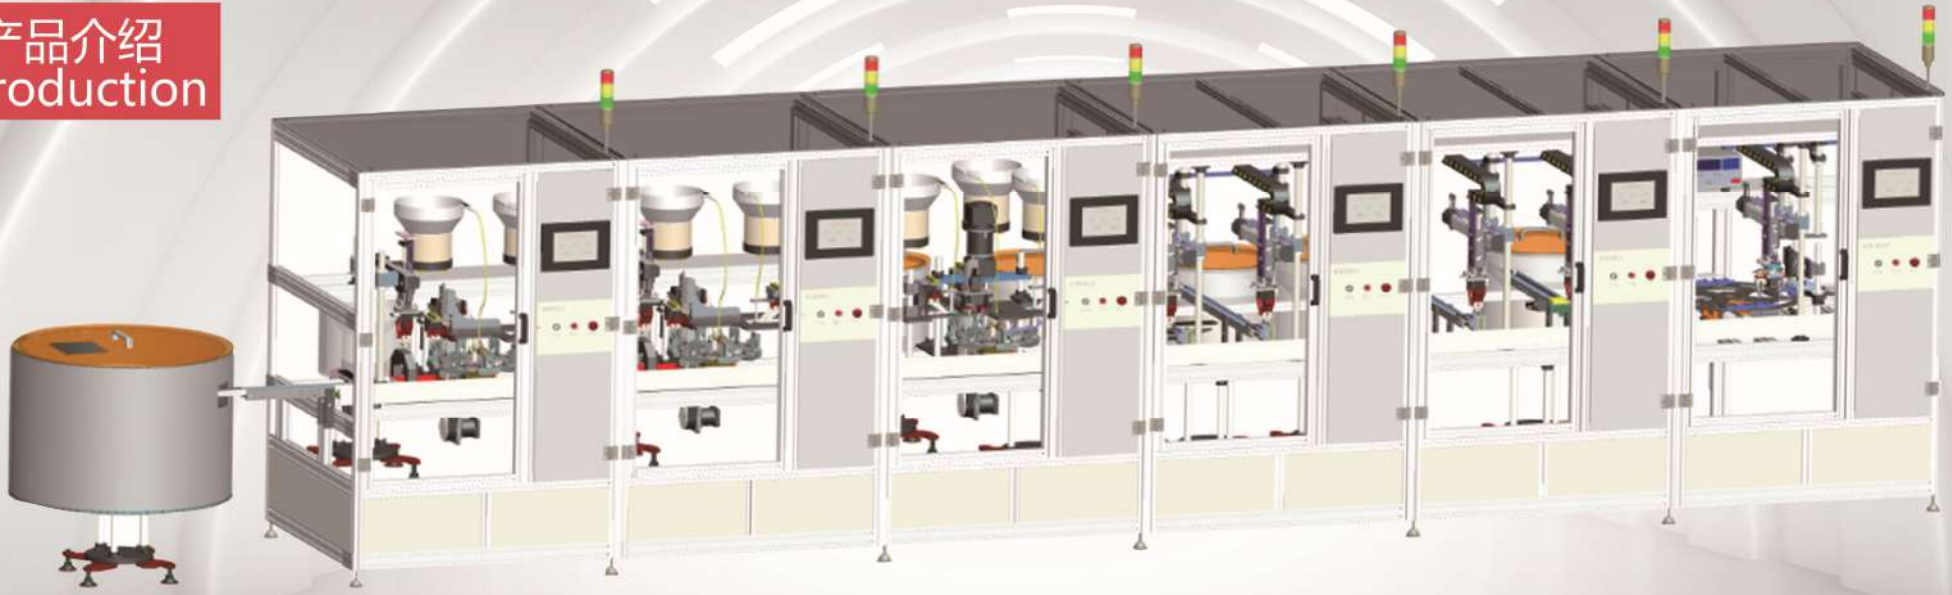

该设备包含零件装配、插拔力检测、介电强度测试等单元,是用来装配、测试墙壁插座的设备。插拔力检测可根据不同的要求进行设置。设备在0-50°C的环境下都能正常运行。整体机械结构设计合理,机械强度高,维护简单。
The equipment consists of component assembly unit, insertion and withdrawal force test unit, dielectric strength test unit. It is used to assemble and test all the functions of socket. The insertion and withdrawal force test can be adjusted according to the different requirement. The equipment can operate normally at the temperature of 0-50 °C. The whole mechanical structure is designed reasonably, the mechanical strength is strong, and the maintenance is simple.

设备参数 Equipment parameter

产品名称 Description	插座自动装配检测生产线 Socket Automatic Assembly & Testing Line
型号 Model	KESU-QBCZ-02B
功能 Function	零件装配、在线检测 Component Assembly, Online testing
共用性 Versatility	三种不同外形面板(装配尺寸一样) Three different shape panels (The assembly size is same)
输入电压 Input Voltage	AC380V 50Hz
内部电压 Inner Voltage	24VDC
气压 Pressure	0.6MPa-0.65MPa
设备寿命 Equipment Life	10年 10 years
设备产能 Equipment Capacity	12-15Pcs/分钟 12-15Pcs/min
设备尺寸 Equipment Dimensions	7500×1200×1900mm

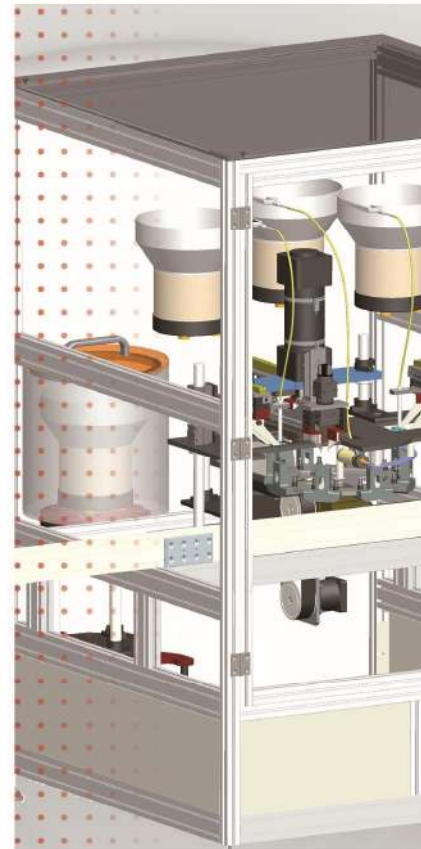

适用产品 Application range



主要配件合作伙伴 Main components partner

OMRON

SMC

Panasonic

THK

SANCI

Schneider
Electric